

SEERVII



ELECTRICAL CATALOG

Reliable power distribution solution

www.seervii.com

About seervii


Reliable Industrial Supply. Trusted Global Trade.

SEERVII is an India-based industrial supply and export company, providing a wide range of engineering products to industries and global buyers.

We specialize in sourcing and supplying valves, pumps, electric motors, bearings, fasteners, flanges, pipe fittings, electrical items, power tools, and safety products through a trusted supply network.

With a focus on quality, timely delivery, and transparent communication, SEERVII supports both domestic and international customers with dependable supply solutions.

Circuit Breakers MCB

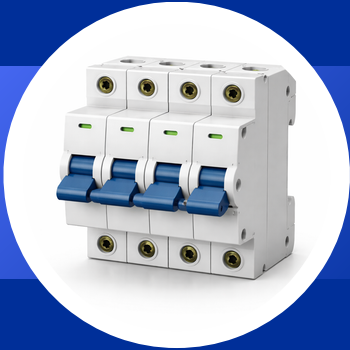

- **Current Rating:** 0.5A to 125A
- **Poles:** SP / DP / TP / TPN / 4P
- **Breaking Capacity:** 6kA / 10kA / 16kA
- **Voltage:** 240V / 415V
- **Trip Curve:** B / C / D Curve
- **Mounting:** DIN Rail Mounting
- **Standard:** IS / IEC 60898-1
- **Applications:** Residential, Commercial, Industrial Panels, Distribution Boards

Circuit Breakers MCCB



- **Current Rating:** 16A to 2500A
- **Poles:** 3P / 4P
- **Breaking Capacity:** 25kA to 100kA
- **Voltage:** 415V / 690V
- **Trip Unit:** Thermal-Magnetic / Electronic
- **Mounting:** Panel Mounting
- **Standard:** IEC 60947-2
- **Applications:** Industrial Panels, Power Distribution, Motors, Generators

Contactors




- **Current Rating:** 9A to 800A
- **Poles:** 2P / 3P / 4P
- **Voltage:** 230V / 415V / 690V
- **Coil Voltage:** 24V / 110V / 230V / 415V
- **Type:** AC Contactor / DC Contactor
- **Mounting:** DIN Rail / Panel Mounting
- **Standards:** IEC 60947
- **Applications:** Motor Control, HVAC, Pumps, Automation Panels, Industrial Switching

Cable Trays & Accessories



- **Size Range:** Width: 50 mm to 1000 mm / Length: 2 m to 3 m
- **Types:** Ladder Type / Perforated Type / Solid Bottom / Wire Mesh
- **Material:** GI / Mild Steel / Stainless Steel / Aluminum
- **Thickness:** 1.2 mm to 3 mm (Custom Available)
- **Finish:** Pre-Galvanized / Hot Dip Galvanized / Powder Coated
- **Accessories:** Bends, Tees, Reducers, Covers, Clamps, Supports
- **Load Capacity:** Light / Medium / Heavy Duty
- **Applications:** Electrical Wiring, Industrial Plants, Data Centers, Commercial Buildings

Relay



- **Current Rating:** 5A to 100A
- **Voltage:** 12V / 24V / 110V / 230V / 415V
- **Type:** Electromechanical / Solid State (SSR)
- **Contact Configuration:** SPDT / DPDT / 3PDT
- **Mounting:** DIN Rail / Plug-in / PCB Mount
- **Coil Voltage:** AC / DC Options Available
- **Standards:** IEC / IS Standards
- **Applications:** Control Panels, Automation, Protection Circuits, Industrial Equipment

Industrial Cable



- **Size Range:** 0.5 sq.mm to 400 sq.mm
- **Type:** Power Cable / Control Cable / Instrumentation Cable / Flexible Cable
- **Conductor:** Copper / Aluminum
- **Insulation:** PVC / XLPE / EPR
- **Core:** Single Core / Multi Core
- **Armouring:** Unarmoured / Steel Wire Armoured (SWA) / Steel Tape Armoured (STA)
- **Voltage Grade:** Up to 1.1 kV / 11 kV / 33 kV
- **Applications:** Power Distribution, Industrial Wiring, Control Panels, Infrastructure


Cable Gland

- **Size Range:** M12 to M100 / PG / NPT Threads
- **Type:** Single Compression / Double Compression / Flameproof
- **Material:** Brass / Stainless Steel / Nylon
- **Thread Type:** Metric / PG / NPT / BSP
- **Sealing:** IP65 / IP66 / IP68 Protection
- **Finish:** Nickel Plated / Natural / SS Finish
- **Application Cable:** Armoured / Unarmoured
- **Applications:** Electrical Panels, Hazardous Areas, Industrial Wiring, Cable Termination



Terminal Block

- **Design:** Thin Section / Drawn Cup / Cage Type
- **Material:** High Carbon Chrome Steel / Alloy Steel
- **Precision:** Standard / High Precision
- **Sealing:** Open / Sealed
- **Cage:** Steel
- **Temperature Range:** -20°C to +120°C
- **Applications:** Automotive, Gearboxes, Compressors, Compact Machinery

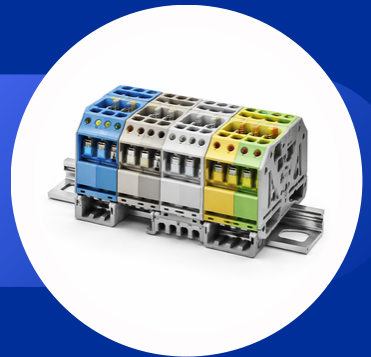

Control Panel

- **Current Rating:** 5A to 150A
- **Voltage:** Up to 1000V
- **Type:** Screw Type / Spring Clamp / Barrier Type / Push-in
- **Mounting:** DIN Rail / Panel Mount
- **Material:** Polyamide / Nylon / Ceramic
- **Conductor:** Copper / Brass Contacts
- **Temperature Range:** -20°C to +120°C
- **Applications:** Control Panels, Industrial Wiring, Automation Systems, Electrical Distribution



Distribution Board



- **Type:** Single Door / Double Door / Indoor / Outdoor
- **Material:** CRCA Steel / Stainless Steel / Polycarbonate
- **Mounting:** Wall Mounted / Floor Mounted
- **Protection:** IP42 / IP54 / IP65
- **Configuration:** MCB / MCCB / RCCB / Isolator Based
- **Finish:** Powder Coated / Painted
- **Voltage:** 240V / 415V
- **Applications:** Residential, Commercial, Industrial Power Distribution

VARIABLE FREQUENCY DRIVES



- **Power Range:** 0.5 HP to 500 HP
- **Voltage:** 220V / 415V / 690V
- **Phase:** Single Phase / Three Phase
- **Control Type:** V/F Control / Vector Control
- **Frequency Range:** 0 to 400 Hz
- **Protection:** Overload / Overvoltage / Short Circuit / Thermal
- **Mounting:** Panel Mount / Wall Mount
- **Applications:** Pumps, Fans, Conveyors, HVAC, Industrial Automation

Switchgear & Panels



- **Type:** LT Panel / HT Panel / MCC / PCC / Control Panel
- **Voltage:** Up to 415V (LT) / Up to 33kV (HT)
- **Material:** CRCA Steel / Stainless Steel
- **Protection:** IP42 / IP54 / IP65
- **Components:** MCB / MCCB / ACB / VFD / Relays / Contactors
- **Mounting:** Floor Mounted / Wall Mounted
- **Finish:** Powder Coated
- **Applications:** Power Distribution, Industrial Automation, Process Control, Infrastructure

Power Distribution Boards



- **Type:** LT Distribution Board / Main Distribution Board (MDB) / Sub Distribution Board (SDB)
- **Voltage:** 240V / 415V
- **Material:** CRCA Steel / Stainless Steel
- **Protection:** IP42 / IP54 / IP65
- **Configuration:** MCB / MCCB / ACB / Busbar Based
- **Mounting:** Wall Mounted / Floor Mounted
- **Finish:** Powder Coated
- **Applications:** Industrial, Commercial, Infrastructure, Power Distribution Systems

Sensor



- **Type:** Proximity / Photoelectric / Temperature / Pressure / Level
- **Output:** NPN / PNP / Analog / Digital
- **Voltage:** 12V / 24V / 230V
- **Sensing Range:** 1 mm to 50 m (Depending on Type)
- **Housing:** Plastic / Metal / Stainless Steel
- **Mounting:** Threaded / Flush / Non-Flush
- **Protection:** IP65 / IP67
- **Applications:** Automation, Packaging, Robotics, Process Control, Industrial Systems

Industrial Lighting



- **Type:** LED High Bay / Flood Light / Panel Light / Flameproof Light
- **Power Range:** 10W to 500W
- **Voltage:** 110V / 220V / 415V
- **Material:** Aluminum Die Cast / Polycarbonate / Glass
- **Protection:** IP65 / IP66 / IP67
- **Mounting:** Ceiling / Wall / Pole Mounted
- **Efficiency:** Energy Efficient LED Technology
- **Applications:** Warehouses, Factories, Outdoor Areas, Hazardous Zones, Industrial Facilities

SEERVII

Contact



+91 8866325879



info@seervii.com



www.seervii.com



Ahmedabad